


4069LE Electric Scissor Lift

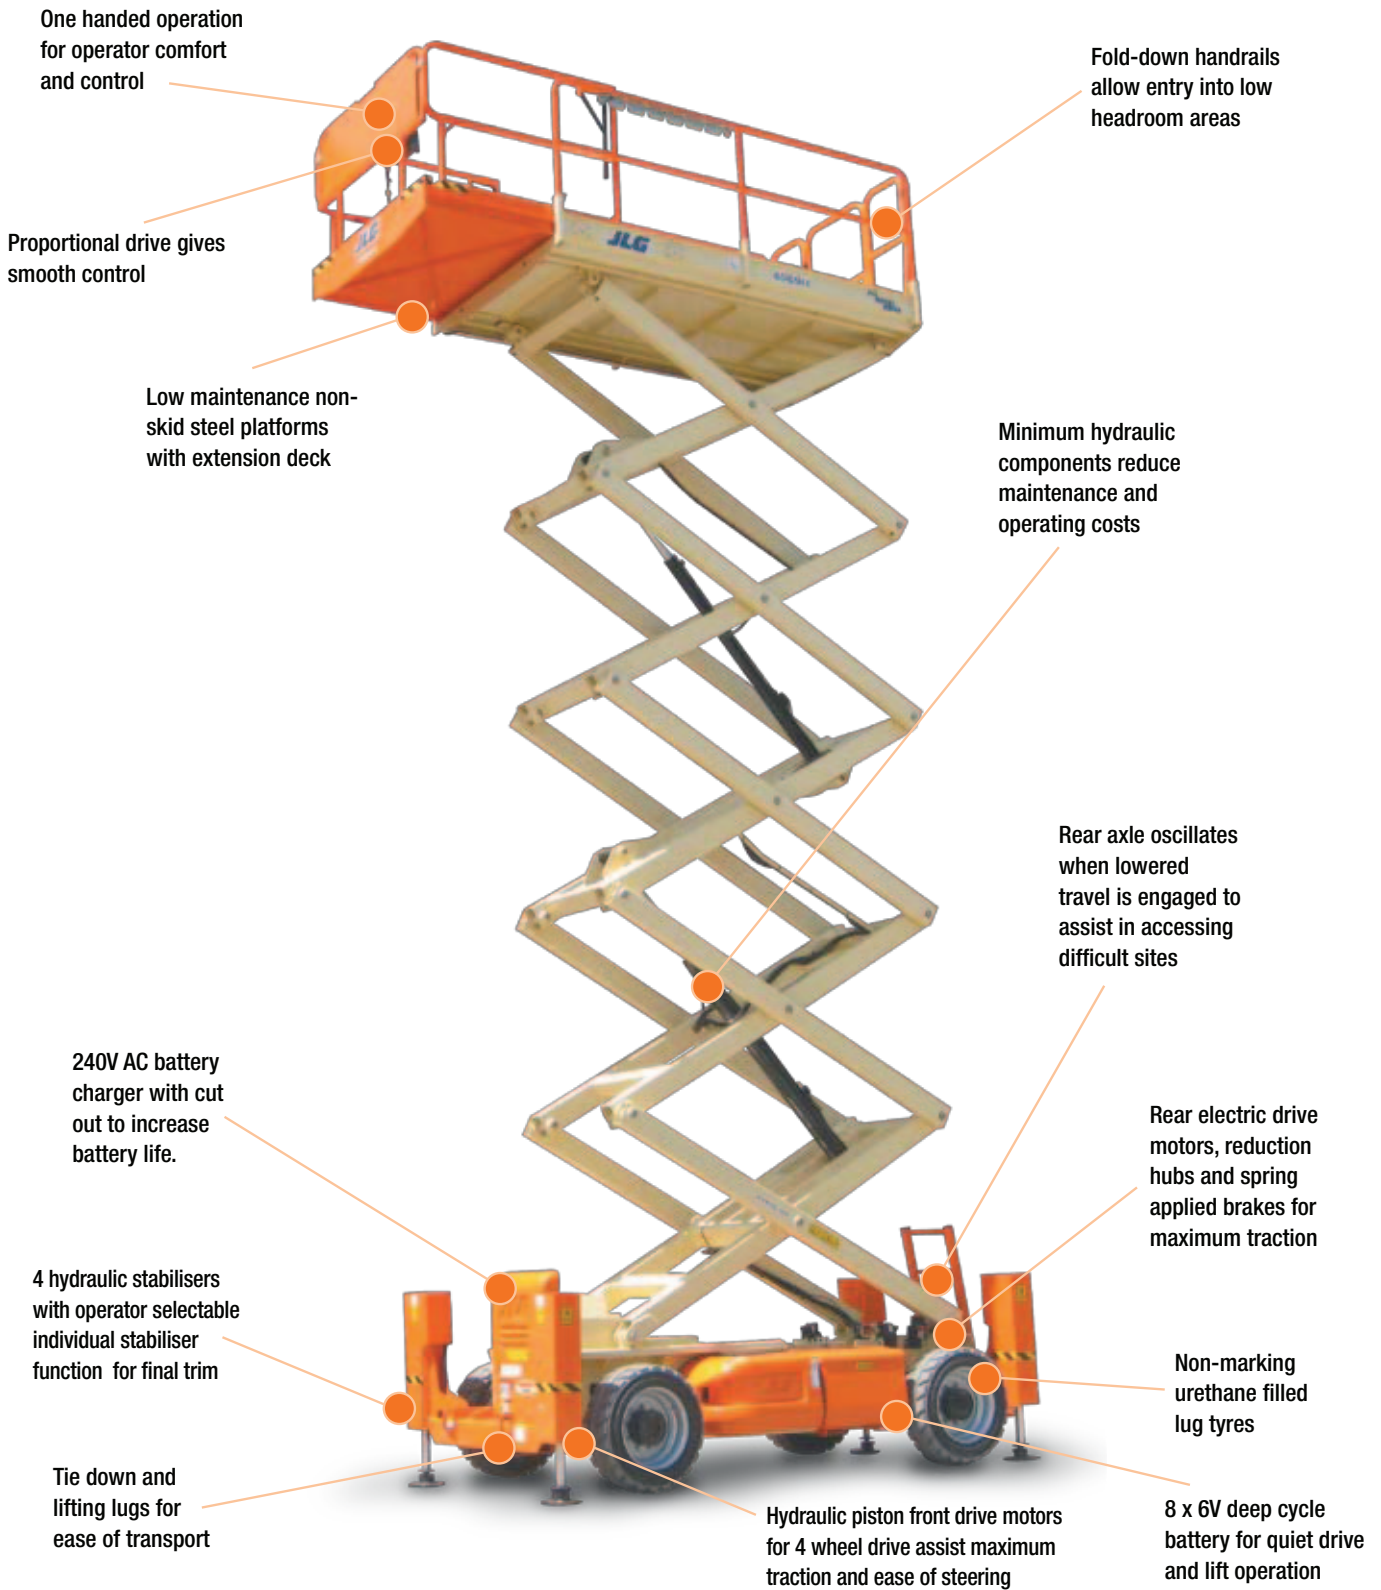

Ph: 1300 87 44 73

**UNIT 13 & 14, 61-63 Regentville Road,
Jamisontown, NSW 2750**

4069LE Electric Scissor Lift



QUESTIONS TO ASK

- What are the ground conditions in the work area?
- Is the site level, will you need stabilisers?
- What is the rated capacity needed for the job?
- Do you need an extension lead outlet in the platform?
- Do you need non-marking tyres?
- Do you have 240V AC power on site?

KEY SELLING POINTS

- Smooth control, proportional electric drive, with two speed ranges
- Oscillating rear axle for constant rear wheel traction
- Four wheel drive assist with front (steer) hydraulic drive motors with constant traction speed sensor
- Fold down rails on main deck and extension platform.
- Non-marking urethane filled tyres
- Constant traction rear 2 wheel drive combined with drive assist for 45 per cent gradeability
- Wide scissor stack provides rigidity and stability
- Extended stabilisers prevent drive
- Manual level stabiliser feature allows individual stabiliser levelling from platform controller
- Multi axis 4 degree level sensor
- Plug in JLG analyser to indicate system functions for servicing and adjustment
- Removable platform control box

APPLICATIONS

- Facilities maintenance
- Shopping Centres and other indoor/outdoor areas
- Manufacturing and warehouse applications and stock-takes
- Electricians
- Plumbers
- Window installers
- All maintenance and construction work
- Factory fit outs before Electrical power is connected

SPECIFICATIONS

Performance:

Platform Height (max.)	12.19m
Working Height	14.19m
Lift Time	54 sec
Lower Time	50 sec
Platform Capacity Standard	360kg

Dimensions:

Stowed Height - Rails Up	2.81m
Stowed Height - Rails Lowered	2.04m
Minimum Transport Length (outriggers)	3.07 (3.81)m
Overall Width	1.75m
Wheelbase	2.32m
Ground Clearance	0.2m
Platform Width	1.65m
Platform Length	2.92m
Standard Platform Extension	0.91m
Platform Height Lowered	1.75m
Maximum Drive Height	9.14m

Power:

Power Source	Battery
DC Voltage	48V
DC Power	370 Amp h
Drive Motors - Type	DC Electric
Hydraulic Pump - Type	Gear
Batteries	8 x 6V

Travel:

Tyre Size	240/55-17.5
Tyre Type (Non-Marking)	Foam Filled/Non-Marking
Inside Turn Radius	2.29m
Outside Turn Radius	4.88m
Drive Speed Elevated	0.64km/h
Gradeability	35%

Weights and Capabilities:

Hydraulic Tank Capacity	32 Ltr
Operating Weight	5,300kg



Ph: 1300 87 44 73

**UNIT 13 & 14, 61-63 Regentville Road,
Jamisontown, NSW 2750**