



## **SJ9241 RT | SJ9250 RT** **ROUGH TERRAIN SCISSOR LIFTS**

Skyjack's Full-Size Series Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities — all in one package! Both the SJ9241 RT and SJ9250 RT feature an expansive platform, up to 7.21 m in length, when both 1.52 m powered extension decks are extended. With working heights up to 17.24 m and standard independent/auto levelling outriggers, these units can meet the needs of even the most challenging job sites.

An easily accessible Kubota diesel engine powers a robust axle based 4WD system with "no-spin" and limited slip differentials, delivering excellent job site terrainability.



**SKYJACK**<sup>™</sup>


# ROUGH TERRAIN SCISSOR LIFT

## SPECIFICATIONS

SJ9241 RT SJ9250 RT

AS/NZS 1418.10:2011

<b>A Work Height</b>	<b>14.50 m</b>	<b>17.24 m</b>
<b>B Raised Platform Height</b>	<b>12.50 m</b>	<b>15.24 m</b>
<b>C Lowered Platform Height</b>	<b>1.68 m</b>	<b>2.01 m</b>
<b>D Overall Width</b>	<b>2.34 m</b>	<b>2.34 m</b>
<b>E Overall Length</b>	<b>4.47 m</b>	<b>4.47 m</b>
<b>F Stowed Height (Rails Up)</b>	<b>2.84 m</b>	<b>3.16 m</b>
<b>G Stowed Height (Rails Down)</b>	<b>1.98 m</b>	<b>2.29 m</b>
<b>H Platform Width (Inside Dimension)</b>	<b>1.88 m</b>	<b>1.88 m</b>
<b>Platform Length Stowed (Inside Dimension)</b>	<b>4.27 m</b>	<b>4.27 m</b>
<b>I Platform Length Extended (Inside Dimension)</b>	<b>7.21 m</b>	<b>7.21 m</b>
<b>Ground Clearance</b>	<b>0.20 m</b>	<b>0.20 m</b>
<b>Wheelbase</b>	<b>3.02 m</b>	<b>3.02 m</b>
<b>Weight</b>	<b>6715 kg</b>	<b>7407 kg</b>
<b>Gradeability</b>	<b>25%</b>	<b>25%</b>
<b>Turning Radius (Inside)</b>	<b>5.33 m</b>	<b>5.33 m</b>
<b>Turning Radius (Outside)</b>	<b>7.65 m</b>	<b>7.65 m</b>
<b>Lift Time (With Rated Load)</b>	<b>62 sec</b>	<b>64 sec</b>
<b>Drive Speed (Stowed)</b>	<b>3.8 km/h</b>	<b>3.8 km/h</b>
<b>Drive Speed (Raised)</b>	<b>0.72 km/h</b>	<b>0.72 km/h</b>
<b>Maximum Drive Height</b>	<b>Full Height</b>	<b>7.9 m</b>
<b>Capacity (Overall)</b>	<b>681 kg</b>	<b>681 kg</b>
<b>Maximum # of Persons</b>	<b>5</b>	<b>5</b>

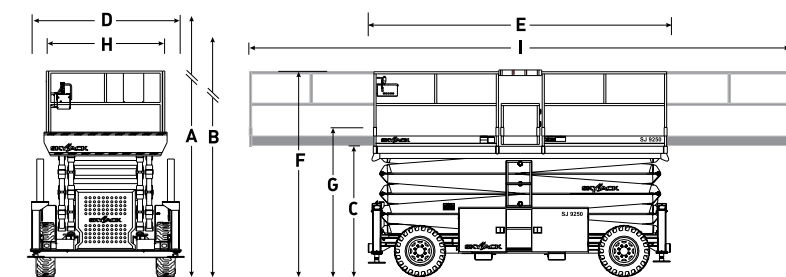

## STANDARD FEATURES

- Axle based 4WD system
- "Detroit Locker" type rear differential and limited slip front differential
- Diesel engine on roll out tray
- 1.52 m powered extension decks
- Disc brake system on rear axle
- Independent/Auto leveling outriggers
- 25% gradeability
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Overload sensing system
- Lowering warning system
- Lanyard attachment points
- Tie down/lift lugs
- Operator horn
- Flashing light
- Fold down hinged railing system
- Half height spring hinged gates on both sides
- Analog control system
- Colour coded and numbered wiring system
- 10 x 16.5 grip lug foam-filled tyres

## OPTIONS‡

- Diesel scrubber
- Shop airline to platform
- Full height spring hinged gates
- Cold weather start package  
(Includes hydraulic oil tank heater, battery blanket, block heater)
- Non-marking grip lug foam-filled tyres

‡ Capacities, and machine weights may differ when options are added

\* With standard tyres

Model	Capacity With 2 Extension Decks*		
	Main	Front Ext.	Rear Ext.
SJ 9241	227 kg	227 kg	227 kg
SJ 9250	227 kg	227 kg	227 kg

## Skyjack Australia Pty Ltd

4 Coates Place  
Wetherill Park  
New South Wales, 2164  
Tel: +61 (0) 2878 63200  
Fax: +61 (0) 2878 63222  
Email: jcranmer@skyjack.com

www.skyjack.com



# SKYJACK™

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. AS marked platforms are in conformance to Standard AS/NZS 1418.10:2011.